

PRODUCT



Item no.: 001-0310X
+ style code

DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE FLOOR LAMP BL3S

Shade and base: Powder coated aluminium
Tube and arm: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL3S, BL3M, BL3 Original shade, BL4

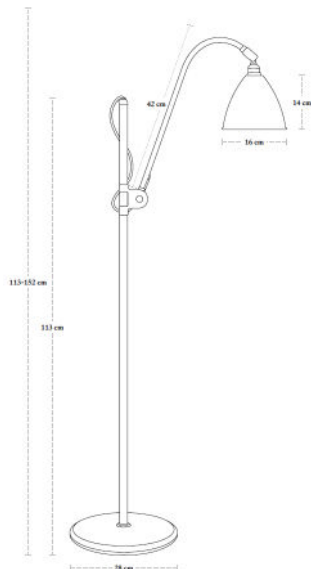

COLOURS



// Black / Chrome

// Off-White / Chrome

// White / Chrome

FACTS

MEASUREMENT - L X W X H MM

Lamp height: 1130-1520 mm
Lamp stand: Ø280 mm
Shade height: 140 mm
Shade diameter: Ø160 mm
Cord - total length w/sw: App. 4500 mm
Cord - exposed out of lamp: App. 4230 mm

WEIGHT ITEM - LAMP INCL. WIRE
5426 g

PACKAGING TYPE

White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM

L:34 x W:37 x H:120 cm

WEIGHT PACKAGING - MATERIAL TYPE

- LD EPE foam bund: 68,5 g
- LD EPE foam top: 148,5 g
- LD EPE foam top: 75,5 g
- Bestlite key: 18 g
- PE polybag: 1 g
- PE polybag: 180g
- Cardboard inside: 23 g
- Cardboard outside: 1713 g
- Strapping: 7 g

WEIGHT PACKAGING - TOTAL

7742 g

NUMBER OF PARCELS

1 pcs.

LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*

- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- *All lamps can be fitted with a dimmer.
Please contact your local electrician.*

- *Lightbulb not included*

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT


-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

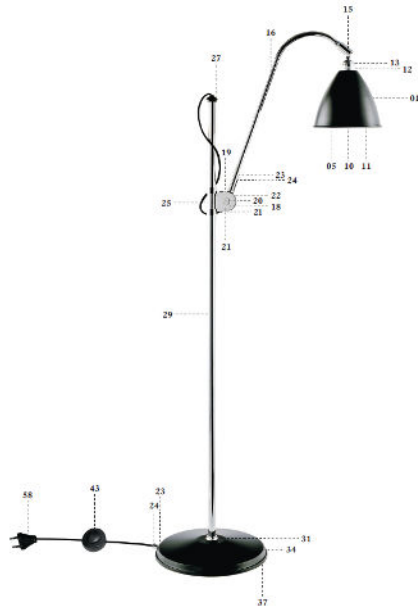

STANDARD

STOCK - BL3S: Floor lamp

- Euro plug: Type C, 2 PIN, 2,5 amp
- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

KOMPONENTS

- 01 // Shade, 115,5 g
- 05 // Lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 15 // Universal joint
- 16 // Bestlite arm
- 18 // Bestlite clip
- 19 // Bestlite nut
- 20 // Bestlite bolt
- 21 // Tension spring
- 22 // Fibre washer
- 23 // Cord grip
- 24 // Cord grip cover
- 25 // Acetate
- 27 // Top knob with hole
- 29 // Tube
- 31 // Collar
- 34 // Base cover
- 37 // Feltac
- 38 // Textile covered cord
- 43 // Foot switch
- 58 // Plug

Item no.: 001-0310X

14 // Bestlite key

MATERIAL


Shade and base: Powder coated aluminium
Tube and arm: Chromed steel
Textile covered cord

INSTALLATION INSTRUCTIONS

The Bestlite key:

It's a practical tool that enables you to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

1.1 Important for safety!
Do not use in areas with humidity, and use directly on your wall for accurate placing of the hole.
Always use the installation key!



Technical information:

Light source: E14 E-27 Incandescent or LED halogen bulb.
Not power of more than 40W halogen bulb.
The lamp is not approved for outdoor use or use in damp/bathrooms.

Some advice on cleaning your Bestlite:

Powder coated parts - base, bracket and shade:
Wipe the parts with a damp cloth. Avoid to use water and a lot of acid detergent.

Chrome plated parts:
Wipe the lamp with a damp cloth and wipe dry by using up items.
If the surface is scratched or scratched, clean immediately by abrasion or other soft media.

Use only soft cloth for rubbing and polishing, never damage or abraded.
Do not use abrasive household cleaners.

Do not use acidic or alkaline cleaning methods, glass cleaner or household ammonia.
Do not use acidic or alkaline cleaning methods, glass cleaner or household ammonia.

BESTLITE - GUBI (B&B) A/S, DK-2450, Copenhagen, Denmark - www.bestlite.com



Your Bestlite customer:

Congratulations on your Bestlite!
You have chosen a modern design lamp, which has been designed and produced in the best possible way. It is a pleasure to have you as a customer. We are sure you will be satisfied with the quality and the design of your Bestlite lamp.

Do not forget to read the instructions for use and the safety instructions. They are very important for the safe use of your Bestlite lamp.

Do not forget to read the instructions for use and the safety instructions. They are very important for the safe use of your Bestlite lamp.


Do not forget to read the instructions for use and the safety instructions. They are very important for the safe use of your Bestlite lamp.

Do not forget to read the instructions for use and the safety instructions. They are very important for the safe use of your Bestlite lamp.

Do not forget to read the instructions for use and the safety instructions. They are very important for the safe use of your Bestlite lamp.

Do not forget to read the instructions for use and the safety instructions. They are very important for the safe use of your Bestlite lamp.

BESTLITE
SINCE 1930




Mounting the shade and Bestlite key

1. Remove the shade and Bestlite key from the lamp.

2. Insert the Bestlite key into the slot in the Bestlite nut.

3. Push the Bestlite key into the Bestlite nut until it is fully inserted.

4. Push the shade into the Bestlite nut until it is fully inserted.



The adjustability of the lamp arm

The lamp arm can be adjusted in 15° increments.

To adjust the lamp arm, simply turn the Bestlite key clockwise or counter-clockwise.

The lamp arm will stop at the desired angle.

The lamp arm will stay in position until you turn the Bestlite key again.




The Bestlite key

The Bestlite key is used to adjust the lamp arm.

It is a practical tool that enables you to fasten the lamp arm.

Simply use it like a screwdriver in the slot in the Bestlite nut.




Wall mounting instructions

The lamp can be mounted on a wall.

To mount the lamp on a wall, use the Bestlite key to adjust the lamp arm.

The lamp arm will stop at the desired angle.

The lamp arm will stay in position until you turn the Bestlite key again.



The wall mounting guide

The wall mounting guide is used to mark the wall for mounting the lamp.

It is a practical tool that enables you to mark the wall accurately.

Simply use it like a pencil to mark the wall.

The wall mounting guide will stay in position until you turn the Bestlite key again.



Connection key and guide

The connection key and guide are used to connect the lamp to the wall.

It is a practical tool that enables you to connect the lamp accurately.

Simply use it like a screwdriver to connect the lamp.